

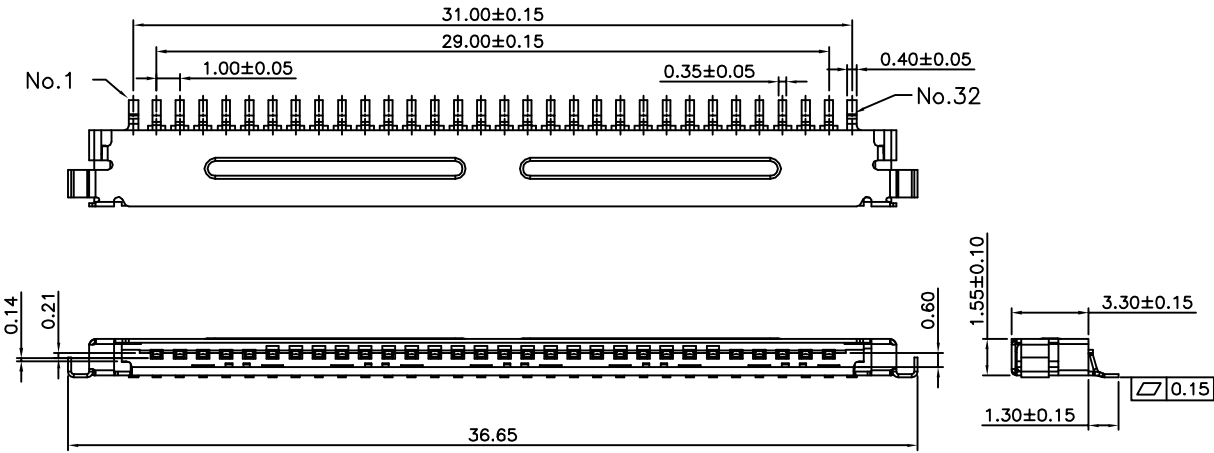


A
B
C
D
E

A
B
C
D
E

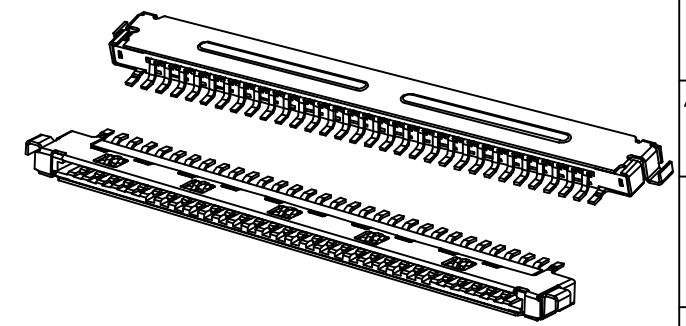

Specifications:
 Current Rating:1.0 Amp
 Voltage Rating:200V AC/DC
 Contact resistance:40m Ohm Max
 Insulator resistance:100M ohm min.
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-25°~+85°C
 Material And Finish
 Insulator:LCP UL 94V-0
 Shell: Phosphor Bronze/Tin-plated
 Pin Material: Phosphor Bronze/Gold-plated
 Shell: Phosphor Bronze/Tin-plated
 Color: Natural(Beige)
 How To Order
 1006SW-30GF-H
 H:Horizontal SMT Type
 GF:Gold Flash
 No. of Positions

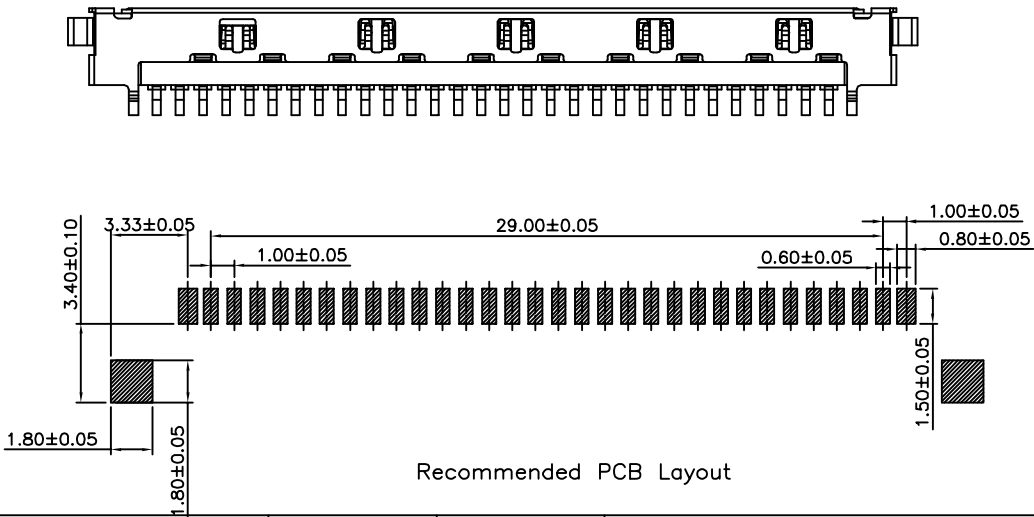

Recommended PCB Layout

1.3				 崧嵐企業有限公司 TOWNES ENTERPRISE CO.,LTD	x.x: ±0.25	x:	TITLE : 1.00mm Pitch 90°Wafer-SMT Type	A4	
1.2					x.xx: ±0.15	x.X:	APPD.: Alan Chao		PART NO : 1006SW-30GF-H
1.1						x.xxx: ±0.05	x.XX:	CHKD.:	DWG. NO.: RDA091117-009
1.0	RELEASED	Cel Wang	17-Nov-2009	MAT'L.:	UNIT: mm		DR: Cel Wang	REV: 1.0	DATE: 17-Nov-2009
REV.	ECN. NO.	DR. BY	DATE		SCALE: 1:1	SHEET: 1/1			