




REV.	ECN NO.	DATE
REV.	RELEASED	12/17/2001


No. of Contacts	DIMENSIONS		No. of Contacts	DIMENSIONS	
	A	B		A	B
3	2.54	4.01	27	33.02	34.49
4	3.81	5.28	28	34.29	35.76
5	5.08	6.55	29	35.56	37.03
6	6.35	7.82	30	36.83	38.30
7	7.62	9.09	31	38.10	39.57
8	8.89	10.36	32	39.37	40.84
9	10.16	11.63	33	40.64	42.11
10	11.43	12.90	34	41.91	43.38
11	12.70	14.17	35	43.18	44.65
12	13.97	15.44	36	44.45	45.92
13	15.24	16.71	37	45.72	47.19
14	16.51	17.98	38	46.99	48.46
15	17.78	19.25	39	48.26	49.73
16	19.05	20.52	40	49.53	51.00
17	20.32	21.79	41	50.80	52.27
18	21.59	23.06	42	52.07	53.54
19	22.86	24.33	43	53.34	54.81
20	24.13	25.60	44	54.61	56.08
21	25.40	26.87	45	55.88	57.35
22	26.67	28.14	46	57.15	58.62
23	27.94	29.41	47	58.42	59.92
24	29.21	30.68	48	59.69	61.16
25	30.48	31.95	49	60.96	62.43
26	31.75	33.22	50	62.23	63.70



0.42 ±0.05




B ±0.15

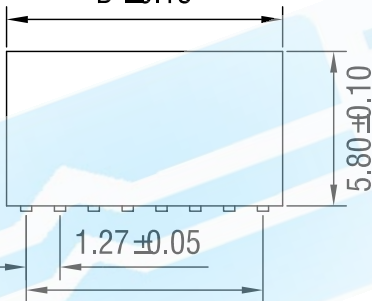


A ±0.10

A




A Type




B Type

P.C.B LAYOUT

B

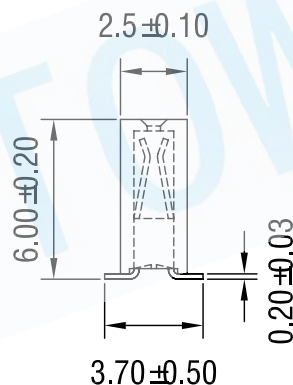

HOW TO ORDER

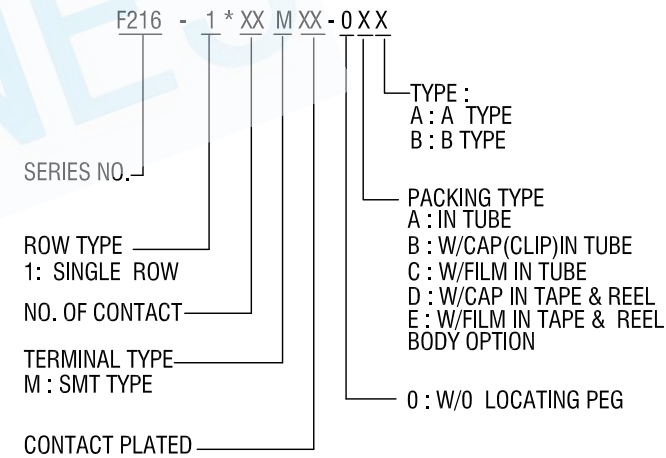

SPECIFICATION

CURRENT RATING : 1 AMPS
 INSULATOR RESISTANCE : 5000 MEGOHMS MIN.
 CONTACT RESISTANCE : 20 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING : AC 500V
 OPERATING TEMPERATURE : -40°C ~ +105°C
 MAX PROCESSING TEMP. : 230°C FOR 30 SECONDS
 (260°C FOR 10 SECONDS)
 CONTACT MATERIAL : PHOSPHOR BRONZE
 INSULATOR MATERIAL : POLYESTER, UL 94V-0
 STANDARD : NYLON-6T
 CONTACT PLATED : FULL GOLD

FULL GOLD TYPE

GF : GOLD FLASH
 G1 : GOLD 3u"
 G2 : GOLD 5u"
 G3 : GOLD 10u"
 G4 : GOLD 15u"
 G5 : GOLD 30u"

比例(SCALE)		繪圖(DRAW)	LIQINGYONG 12/17/01	崧嵐企業有限公司 TOWNES ENTERPRISE CO. LTD
單位(UNIT)	MM	審核(CHECK)	/ /	
一般公差(TOLERANCE)		承認(AP"E)	/ /	圖名(NAME): FEMALE HEADER SMT
.0=±0.35 .00=±0.2 ANG=±5°		投影法 PROJECNON	第三角	料號(PART NO.) F216-1*XXMXX-0XX
				圖號(DRAW NO.) 20012117004