







RoHS Compliant Customer Drawing

Specifications:  
 Current Rating:0.4 Amp  
 Voltage Rating:50V AC/DC  
 Contact resistance:20m Ohm Max  
 Insulator resistance:500M ohm min.  
 Withstanding Voltage:200V AC/Minute  
 Operating Temperature:-25~+85°C  
 Material And Finish  
 Insulator Body:LCP UL94V-0,White  
 Insulator Slider:Class Filled PA9T UL94V-0,Black  
 Terminal:Phosphor Bronze, Tin plated  
 Ear:Brass, Tin plated

How To Order

TFP-H6XXZH-BT1-ECX

Package  
 A:In Tube  
 F:In Tape&Reel  
 E:W/Ear  
 Tin Plated  
 B:Lower Contact  
 ZH:W/ZIF Horizontal SMT Type  
 No. Of Positions  
 Pitch:1.0mm

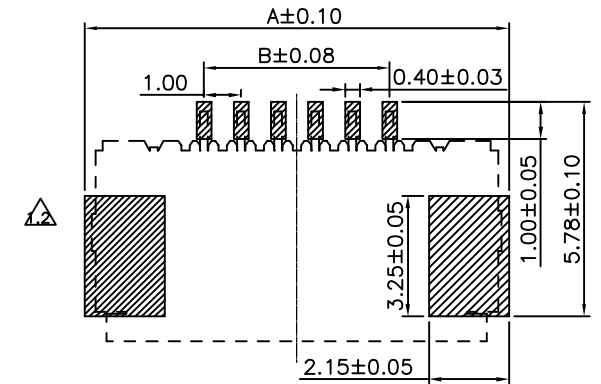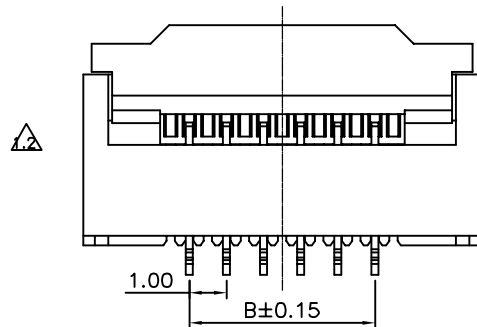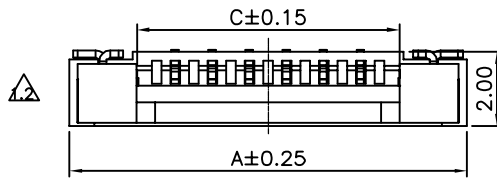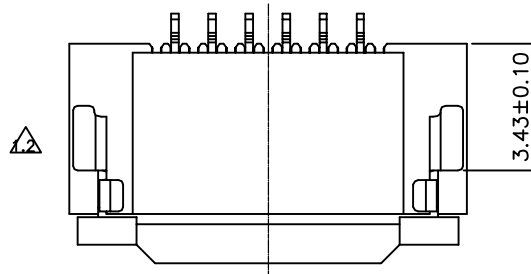


(Tolerance:±0.05)  
 Recommended PCB Layout

NO	A	B	C
04	8.85	3.00	5.07
05	9.85	4.00	6.07
06	10.85	5.00	7.07
07	11.85	6.00	8.07
08	12.85	7.00	9.07
09	13.85	8.00	10.07
10	14.85	9.00	11.07
11	15.85	10.00	12.07
12	16.85	11.00	13.07
13	17.85	12.00	14.07
14	18.85	13.00	15.07
15	19.85	14.00	16.07
16	20.85	15.00	17.07
17	21.85	16.00	18.07
18	22.85	17.00	19.07
19	23.85	18.00	20.07
20	24.85	19.00	21.07
21	25.85	20.00	22.07
22	26.85	21.00	23.07
23	27.85	22.00	24.07
24	28.85	23.00	25.07
25	29.85	24.00	26.07
26	30.85	25.00	27.07
27	31.85	26.00	28.07
28	32.85	27.00	29.07
29	33.85	28.00	30.07

1.3			
1.2	Modify Drawing	CHEN TAO	29-May-2012
1.1	Modify Drawing	CHEN TAO	20-02-2012
1.0	RELEASED	CHEN TAO	18-11-2011
REV.	ECN. NO.	DR.BY	DATE


**崧嵐企業有限公司**  
**TOWNES ENTERPRISE CO.,LTD**  
 MAT'L: \_\_\_\_\_ FINISH: \_\_\_\_\_

Tolerance	ANGLE	TITLE :	A4	
.X ±0.35	.X° ±1.0°	1.0mm Pitch FPC W/ZIF W/Ear Lower Contact Horizontal SMT Type		
.XX ±0.25	.XX° ±0.5°	APPD: Alan Chao	PRAT NO :TFP-H6XXZH-BT1-ECX	
XXX ±0.20	.XXx° ±0.2°	CHKD: Cel Wang	DWG. NO.:RDA111118-009	
UNIT: mm		DR: CHEN TAO	REV: 1.2	DATE: 18-11-2011
SCALE: 1:1	SHEET: 1/2			