






RoHS Compliant

Customer Drawing


No.	A	B	C
04	3.00	5.10	6.20
05	4.00	6.10	7.20
06	5.00	7.10	8.20
07	6.00	8.10	9.20
08	7.00	9.10	10.20
09	8.00	10.10	11.20
10	9.00	11.10	12.20
11	10.00	12.10	13.20
12	11.00	13.10	14.20
13	12.00	14.10	15.20
14	13.00	15.10	16.20
15	14.00	16.10	17.20
16	15.00	17.10	18.20
17	16.00	18.10	19.20
18	17.00	19.10	20.20
19	18.00	20.10	21.20
20	19.00	21.10	22.20
21	20.00	22.10	23.20
22	21.00	23.10	24.20
23	22.00	24.10	25.20
24	23.00	25.10	26.20
25	24.00	26.10	27.20
26	25.00	27.10	28.20
27	26.00	28.10	29.20
28	27.00	29.10	30.20
29	28.00	30.10	31.20
30	29.00	31.10	32.20
31	30.00	32.10	33.20
32	31.00	33.10	34.20
33	32.00	34.10	35.20
34	33.00	35.10	36.20
35	34.00	36.10	37.20
36	35.00	37.10	38.20
37	36.00	38.10	39.20
38	37.00	39.10	40.20
39	38.00	40.10	41.20
40	39.00	41.10	42.20

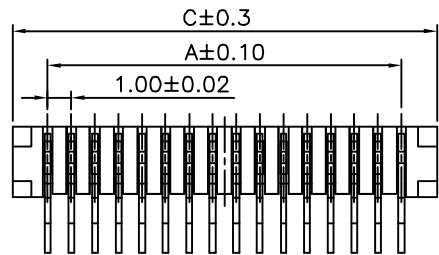

See:A-A

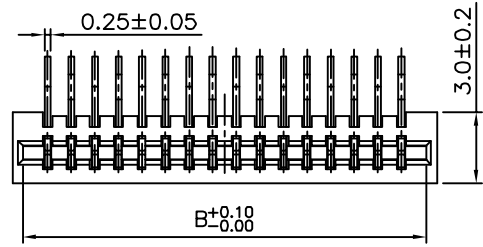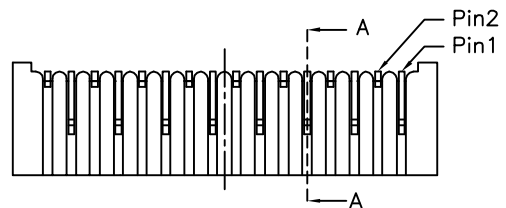

Assembl Layout

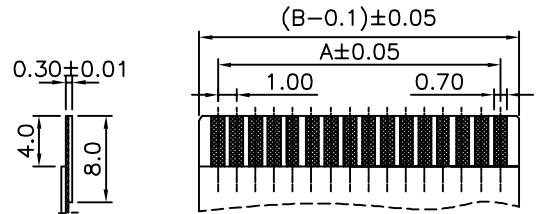

Proper Cable


Specifications:

Current Rating:0.5A AC/DC  
 Voltage Rating:50V AC/DC  
 Contact resistance:20m Ohm Max  
 Insulator resistance:800m ohm min.  
 Withstanding Voltage:500V AC/Minute  
 Operating Temperature Range:-25°C~+85°C  
 Material And Finish  
 Insulator:PPS UL94V-0  
 Contact:Phosphor Bronze  
 Contact Plated:Full Tin plated,


How To Order

TFP-R6XXNR-DT1-0XX

- Packing
- A:In Tube
- H:In Tray
- A:A Type
- B:B Type
- No. of Positions

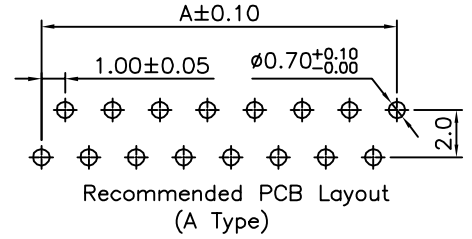

Recommended PCB Layout (A Type)

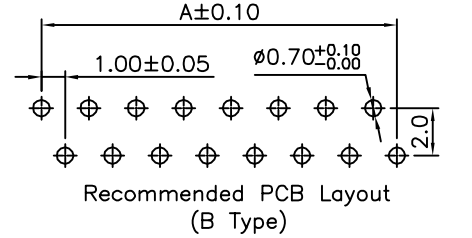

Recommended PCB Layout (B Type)

1.3			
1.2			
1.1			
1.0	RELEASED	HuangBingqiu	10-Nov-2009
REV.	ECN. NO.	DR.BY	DATE



崧嵐企業有限公司  
**TOWNES ENTERPRISE CO.,LTD**

XX: ±0.40	X: ±2.0'
X.: ±0.25	X.X': ±1.0'
X.X: ±0.15	X.XX':
X.XX: ±0.10	X.XXX':
UNIT: mm	
SCALE: 1:1	SHEET: 1/1

TITLE : 1.00mm Pitch FPC  
 Non Zif R/A Dual Contact

**A4**

APPD.: Alan Chao	PART NO : TFP-R6XXNR-DT1-0XX
CHKD.: Cel Wang	DWG. NO.: RDA091110-002(JD)
DR.:HuangBingqiu	REV.:1.0
	DATE: 10-Nov-2009